



—SUNSHINE—

SHIJIAZHUANG SUNSHINE
IMP/EXP TRADE CO.,LTD

NAIL SERIES

The main products of the nail series include:
Common nail, Roofing nail, Concrete nail, Coil nail,
Duplex nail, Spiral nail, Finishing nail, U type nail,
Square boat nail, Masonry nail, etc.



SUNSHINE



**SHIJIAZHUANG SUNSHINE
IMP/EXP TRADE CO.,LTD**

Tel: 0086-311-85271560

Fax: 0086-311-85271561

Mobile/WhatsApp/WeChat:

+86-13111516795

[Http://www.sjzsunshine.com](http://www.sjzsunshine.com)

[Http://www.sjzsunshinegroup.com](http://www.sjzsunshinegroup.com)

[Http://www.wire-nails.cn](http://www.wire-nails.cn)

Email: francis@sjzsunshine.com

Skype: sjzsunshine

CATALOG

Common nails 01-02

Roofing nails 03-06

Concrete nails 07

Finishing nails 08

U-type nails 09
Duplex head nails

Cut masonry nails
Coil nails 10
Coil roofing nails

Flooring nails
Square boat nails 11
Shooting nails

Ring shank nails
Pallet nails 12
ST nails

Staples
Collated nails 13
Chipboard screw

Drywall screw 14-15

Self drilling screw 16-17

Common Nails



Size		Length(mm)	Diameter(mm)	KG/1000PCS	PCS/1KG
Inch	BWG				
3/8	20	9.52	0.89	0.046	21730
1/2	19	12.7	1.07	0.088	11360
5/8	18	15.87	1.25	0.152	6580
3/4	17	19.05	1.47	0.25	4000
1	16	25.4	1.65	0.42	2380
1-1/4	15	31.75	1.83	0.65	1540
1-1/2	14	38.1	2.11	1.03	971
1-3/4	13	44.45	2.41	1.57	637
2	12	50.8	2.77	2.37	422
2-1/2	11	63.5	3.05	3.58	279
3	10	76.2	3.4	5.35	187
3-1/2	9	88.9	3.76	7.65	131
4	8	101.66	4.19	10.82	92.4
4-1/2	7	114.3	4.57	14.49	69
5	6	127	5.16	20.53	48.7
6	5	152.4	5.59	28.93	34.5
7	4	177.8	6.05	40.32	24.8

■ Bright

■ Electro galvanized

■ Hot dip galvanized



Material: Q195 or Q235

Specification: Flat head, checkered head, diamond point

Finish: Bright, EG, HDG

Size: 1/2"- 10", BWG4-20 for all kinds of round nails

Uses: Mainly for building construction, packing and furniture



Roofing Nails

Roofing nails with umbrella head



Size	Shank dia (mm)		Head dia (mm)	Length (mm)
	BWG	Inch		
8	2	4.19	20	51.2
	2.5			64
	3			76.2
9	1.5	3.85	20	38.4
	2			51.2
	2.5			64
10	3	3.4	20	76.2
	1.75			44.5
	2			51.2
11	2.5	3.15	18	64
	2			51.2
	1.5			38.4
12	1.75	2.8	18	44.5
	2			51.2
	2.5			64
13	1.5	2.38	14	38.4
	1.75			44.5
	2			51.2

Material: Q195 or Q235

Specification: Umbrella head, diamond point, smooth shank and twisted shank

Finish: Bright, EG, HDG

Uses: Mainly for building construction

■ Smooth shank



■ Twist shank



■ Spiral shank



■ Washer



IBR roofing nails with washer



Diameter: 3.5mm-5.0mm

Length: 75mm, 90mm, 100mm, 120mm

Finish: EG

Packing: One set (100screw+100washer) in poly-bag, 10 poly-bags per carton

■ Roofing nails washer type



Assembled screw washer



Assembled screw washer



EVA washer



Split washer



Metal washer

Roofing nails with flat head (Clout nails)



Shank dia (mm)	Length (inch)
2.5/2.8/3.0	3/4
	7/8
	1
	1-1/4
	1-1/2
	1-3/4
	2

Uses: Mainly for building construction

Material: Q195 or 235

Specification: Flat head, smooth shank, diamond point

Finish: Bright, EG, HDG

Size: 1" - 4", shank diameter 2.8mm - 3.1mm

■ Bright



■ Electro galvanized



■ Hot dip galvanized



■ Spiral shank





**Roofing nails
packaging**



Concrete Nails



Size		Length (mm)	Head dia (mm)
Inch	BWG		
3/4	19/18/17	19	3.0
1	17/16/15/14	25.4	3.5
1-1/4	16/15/14	31.7	4.0
1-1/2	15/14/13	38	4.3
1-3/4	14/13	44.4	4.8
2	14/13/12/11/10	50.8	5.5
2-1/2	13/12/11/10	63.5	6.0
3	12/11/10/9/8	76.2	7.0
3-1/2	11/10/9/8	89	7.5
4	9/8	101.6	8.0

Material:#45 steel

Specification:Flat head, diamond point or needle point

Smooth shank, fluted shank and spiral shank

Finish:Bright, EG, yellow paint, black, blue

■ Smooth shank



■ Fluted shank



■ Spiral shank



■ Bamboo shank



■ Yellow



■ Black



Finishing Nails



Size		Length(mm)	Diameter(mm)	KG/1000PCS	PCS/1KG
Inch	BWG				
3/8	20	9.52	0.89	0.046	21730
1/2	19	12.7	1.07	0.088	11360
5/8	18	15.87	1.25	0.152	6580
3/4	17	19.05	1.47	0.25	4000
1	16	25.4	1.65	0.42	2380
1-1/4	15	31.75	1.83	0.65	1540
1-1/2	14	38.1	2.11	1.03	971
1-3/4	13	44.45	2.41	1.57	637
2	12	50.8	2.77	2.37	422
2-1/2	11	63.5	3.05	3.58	279
3	10	76.2	3.4	5.35	187
3-1/2	9	88.9	3.76	7.65	131
4	8	101.66	4.19	10.82	92.4
4-1/2	7	114.3	4.57	14.49	69
5	6	127	5.16	20.53	48.7
6	5	152.4	5.59	28.93	34.5
7	4	177.8	6.05	40.32	24.8

Material:Q195 or Q235

Specification:Barb head, diamond point, smooth shank

Finish:Bright, EG, HDG



U-type Nails



Size		Length (mm)	Diameter (mm)
Inch	BWG		
3/4	16	19.1	1.65
3/4	14	19.1	2.1
3/4	12	19.1	2.77
3/4	9	19.1	3.77
1	14	25.4	2.1
1	12	25.4	2.77
1	10	25.4	3.4
1	9	25.4	3.77
1-1/4	*	31.8	3.77
1-1/2 -- 3	*	38.1	3.77

Material:Q195 or Q235

Specification:Smooth shank, duckbill point or diamond point

Finish:Bright, EG, HDG

Duplex Head Nails



Size	Length (Inch)	Shank		Distance between heads (Inch)
		ASWG	mm	
6D	1-3/4	11	2.87	1/4
8D	2-1/4	10	3.34	1/4
*	2-1/2	10	3.34	1/4
10D	2-3/4	9	3.76	5/16
16D	3	8	4.11	3/8
*	3-1/4	7	4.50	3/8
20D	3-1/2	6	4.87	3/8
30D	4	5	5.26	7/16

Material:Q195 or Q235

Specification:Special heavy top head, smooth shank

Finish:Electric galvanized, hot dipped galvanized, bright


Cut Masonry Nails



Material:Q195 or Q235
 Specification:Square head, blunt point
 Finish:Bright, EG, HDG

Size	Length(Inch)	Counts per Pound
3D	1-1/4	115
4D	1-1/2	125
6D	2	85
7D	2-1/4	78
8D	2-1/2	64
10D	3	48
12D	3-1/4	32
16D	3-1/2	34
20D	4	29

Coil Nails

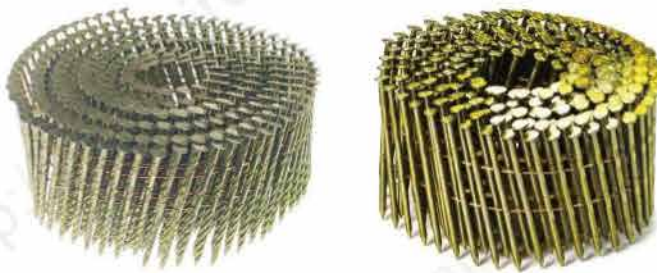

Material:Q195 or Q235
 Shank available:Smooth, ring, spiral, ardox
 Finish:Bright, cement coated, EG, HDG

Shank		Length	
Inch	mm	Inch	mm
0.083	2.1	1-2	25-50
0.090	2.3	1-2*1/4	25-57
0.099	2.5	1*3/4-2*1/2	45-64
0.113	2.87	2-3	50-75
0.120	3.05	2-3*1/2	50-90
0.131	3.33	2-3*3/4	50-95

Coil Roofing Nails



Material:Q195 or Q235
 Shank available:Smooth, ring
 Finish:EG, HDG, MG

Size(Inch)	Shank style	Quantity
3/4	Smooth	7.2M Carton
7/8	Smooth	7.2M Carton
1	Smooth	7.2M Carton
1-1/4	Smooth	7.2M Carton
1-1/4	Smooth	3.84M Carton
1-1/2	Smooth	7.2M Carton
1-3/4	Smooth	7.2M Carton
2	Smooth	7.2M Carton
1-1/4	Ring	7.2M Carton
1-1/2	Ring	7.2M Carton

Flooring Nails



Material:Q195 or Q235
 Shank available: Spiral
 Finish:Bright, EG

Size	Length (Inch)	Head size (Inch)	Counts per Pound
4D	1-1/2	5/32	370
6D	2	13/64	180
7D	2-1/4	13/64	160
8D	2-1/2	13/64	110
10D	3	1/4	82
16D	3-1/2	9/32	58

Square Boat Nails



Material:Q195 or Q235
 Specification:Square shank, diamond point, square head
 Finish:Bright, EG, HDG

Length(Inch)	BWG	Length(Inch)	BWG
1	14	2	12
	15	2-1/2	10
	16	3	8
1-1/4	14	3-1/2	7
1-1/2	13	4	6
	14	5	5
1-3/4	13	6	4

Shooting Nails



Material:45# carbon steel
 Packing:100pcs x 50boxes

Shank length(mm)	Head dia	Shank dia
13	7.6	3.5
19		
25		
32		
38		
51		
63		
76		

Ring Shank Nails



Material:Q195 or Q235
 Specification:Flat head or countersunk head
 Finish:Bright; EG

Shank dia(mm)	2	2.36	2.65	3	3.35	3.75	4	5	5.6	6	6.7	8
20												
25												
30												
30												
40												
45												
45												
60												
65												
65												
75												
90												
75												
90												
75												
90												
100												
115												
125												
150												
180												
200												
Head dia(mm)	4.8	5.7	6.4	7.2	8	9	9.6	12	13.4	14.4	16.1	19.2

Pallet Nails



Material:Q195 or Q235
 Specification:Countersunk or flat head, diamond point
 Finish:Bright; EG

Length (Inch)	Shank		Head dia (Inch)	Counts per Pound
	ASWG	mm		
1-5/8	12-1/2	2.50	1/4	278
1-3/4	12	2.68	1/4	220
1-1/4	12	2.68	17/64	160
1-5/8	11	3.06	9/32	170
2	11	3.06	9/32	147
2-1/4	11	3.06	9/32	131
2-1/2	11	3.06	9/32	117
2-1/2	10	3.43	5/16	95
3	10	3.43	5/16	78
3	9	3.76	5/16	66
3-1/2	9	3.76	5/16	57
3-1/2	8	4.12	3/8	48
4	7	4.50	13/32	35

ST Nails



Material:45# carbon steel
 Size:ST18, ST16
 Packing:40pcs/stick, 1000pcs/box, 10boxes/ctn

Length		Head dia (mm)	Shank dia (mm)
Inch	mm		
5/8	16	2.0	1.0
3/4	19		
7/8	22		
1	25		
1-1/8	28		
1-3/16	30		
1-1/4	32		
1-3/8	35		
1-1/2	38		
1-9/16	40		
1-3/4	44		
2	50		

Staples




Material:Q195 or Q235
 Specification:F sery,10 sery,90 sery,92 sery, 95 sery,N sery
 Finish:Bright, EG

■ Other specifications

Model	Length (mm)	Width (mm)	Thickness (mm)	Outside crown (mm)
8004	4	0.91	0.65	12.8
8008	8			
8010	10			
8012	12			
8014	14			
8016	16			



Collated Nails

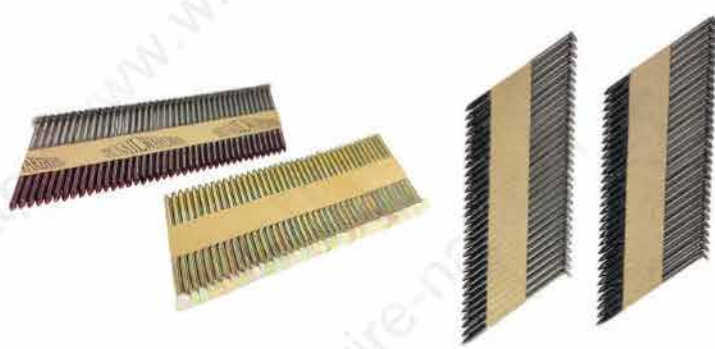

Material:Q195 or Q235
 Specification:Smooth shank, screw shank, ring shank
 Finish:Bright, EG, HDG

Length		Diameter (mm)
Inch	mm	
2-3/16	55	2.87
2-3/8	60	
2-1/2	65	
2-3/4	70	3.33
3	75	
3-1/4	83	
3-9/16	90	

Chipboard Screw




Material:C1022
 Head type:Flat, round, pan, truss
 Finish:Black, yellow, blue, zinc plated, nickel plated

Diameter(mm)	Length(mm)	Diameter(mm)	Length(mm)
3	40	4.5	16
3	50	4.5	30
3	60	4.5	45
3.5	16	4.5	70
3.5	20	5	80
3.5	35	5	100
3.5	45	5	120
3.5	50	5	150
4	16	6	35
4	25	6	180
4	35	6	200


Drywall Screw

Drywall screws fine threaded

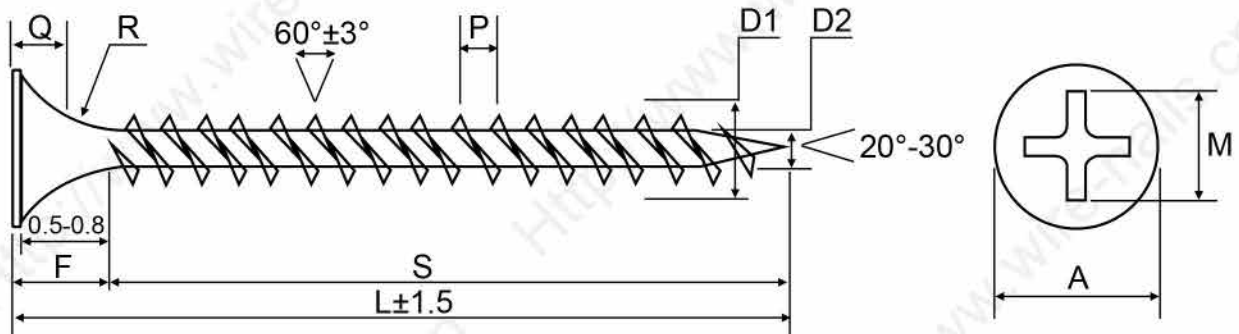

Size (inch)	Length L/(mm)	Head dia A/(mm)	Head F/(mm)	Thread D1/(mm)	Thread D2/(mm)	Pitch P/(mm)	Depth Q/(mm)	Bugle R/(mm)	Recess width M/(mm)
3.5(#6)	13-75	8.2±0.3	7.0	3.6	2.0-2.3	1.4-1.7	2.3-2.9	4.5-5.0	4.5-5.1
3.9(#7)	25-65	8.2±0.3	7.0	4.0	2.3-2.6	1.4-1.7	2.3-2.9	4.5-5.0	4.5-5.1
4.2(#8)	19-100	8.2±0.3	7.0	4.3	2.5-2.8	1.4-1.7	2.3-2.9	4.5-5.0	4.5-5.1
4.8(#10)	25-152	9.1±0.3	7.0	5.0	3.0-3.3	2.1-2.3	2.3-2.9	4.5-5.0	4.5-5.1

Drywall screws coarse threaded

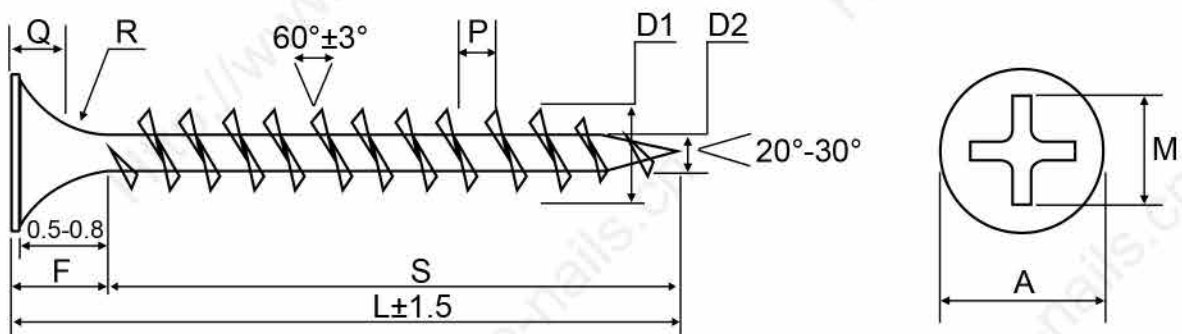

Size (inch)	Length L/(mm)	Head dia A/(mm)	Head F/(mm)	Thread D1/(mm)	Thread D2/(mm)	Pitch P/(mm)	Depth Q/(mm)	Bugle R/(mm)	Recess width M/(mm)
3.5(#6)	13-75	8.2±0.3	7.0	3.9	2.0-2.3	2.7-2.8	2.3-2.9	4.5-5.0	4.5-5.1
3.9(#7)	25-65	8.2±0.3	7.0	4.2	2.2-2.5	2.7-2.8	2.3-2.9	4.5-5.0	4.5-5.1
4.2(#8)	19-100	8.2±0.3	7.0	4.6	2.5-2.8	2.8-2.9	2.3-2.9	4.5-5.0	4.5-5.1
4.8(#10)	25-152	9.1±0.3	7.0	5.2	3.0-3.3	3.1-3.2	2.3-2.9	4.5-5.0	4.5-5.1



Material:C1022A
Diameter:3.5mm-4.8mm
Length:13mm-254mm
Finish:Black, grey phosphate, yellow, blue, white zinc plated
Specification:Fine thread, coarse thread



Self Drilling Screw

Hex head self drilling screw



Size		Length(mm)	Diameter(mm)
Inch	BWG		
3/4	8	19	4.2
1	8	25	4.2
3/4	10	19	4.8
1	10	25	4.8
2	10	51	4.8
3	10	76	4.8
1	12	25	5.5
2	12	51	5.5
3	12	76	5.5
1	14	25	6.3
2	14	51	6.3
3	14	76	6.3
4	14	102	6.3
5	14	127	6.3

Head type:Hex head/Hex flange head

Standard:DIN

Material:C1022, C1022A...

Surface treatment:Zinc plated,painted,mechanical galvanized,dacromet,magni,ruspert

Diameter:4.8mm, 5.5mm, 6.3mm...

Washer:EPDM washer, PVC washer, rubber wash

Pan head self drilling screw



Head type:Pan head

Standard:DIN7504N

Material:C1022, C1022A...

Surface treatment:Zinc plated (White blue zinc plated, yellow zinc, white zinc plated)

Diameter:3.5mm, 3.9mm, 4.2mm, 4.8mm...

Driver types:Phillips

CSK head self drilling screw



Head type: Flat head, CSK head, countersunk head

Standard: DIN7504P

Material: C1022, C1022A...

Surface treatment: Zinc plated (White blue zinc plated, yellow zinc, white zinc plated)

Diameter: 3.5mm, 3.9mm, 4.2mm, 4.8mm...

Driver types: Phillips

Modified truss head self drilling screw



Head type: Truss head, wafer head, bottom head, K-lath head

Material: C1022, C1022A...

Surface treatment: Zinc plated (White blue zinc plated, yellow zinc, white zinc plated)

Diameter: 3.9mm, 4.2mm, 4.8mm...

Driver type: Phillips

Bugle head self drilling screw



Head type: Bugle head

Material: C1022, C1022A...

Surface treatment: Zinc plated (White blue zinc plated, yellow zinc, white zinc plated),
Phosphated (Black phosphated, gray phosphated)

Diameter: 3.5mm, 3.9mm, 4.2mm, 4.8mm...

Driver types: Phillips